


Quality and speed for flat roofs

RoFast is a mounting system for flat roofs that is specifically designed for installers of solar panels. RoFast consists of a minimum number of components, is delivered fully ready-assembled, is completely connected and is available in a south and an east—west setup.



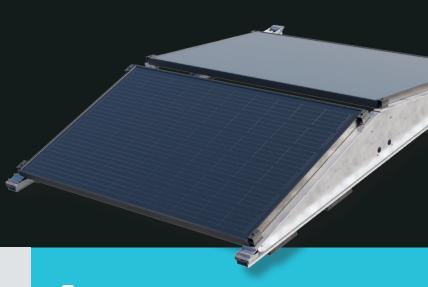

- ✓ Made entirely of aluminium/stainless steel
- ✓ Completely preassembled
- ✓ Fully connected
- ✓ Low ballast
- ✓ Angle 12.5°

- ✓ Panel size 1645–2144 mm
- ✓ Panel width 990–1070 mm
- ✓ Wider panels, panel width 1071–1150 mm
- ✓ Start profile two panels
- ✓ Intermediate profile two panels
- ✓ Different panel dimensions? Just get in touch.







Layout and components



- Start profile E–W
- 2 Intermediate profile E–W
- 3 End clamp
- 4 Intermediate clamp
- Side panel E–W (optional)
- 6 Ballast carrier
- 7 Solar panel

Panel width 990–1070 mm



Panel width 1071–1150 mm

